

# **Cambridge IGCSE**<sup>™</sup>

CANDIDATE NAME					
CENTRE NUMBER			CANDIDATE NUMBER		

# 7 1 6 7 4 1 3 5 0 5

## **DESIGN & TECHNOLOGY**

0445/33

Paper 3 Resistant Materials

May/June 2020

1 hour

You must answer on the question paper.

No additional materials are needed.

#### **INSTRUCTIONS**

- Section A: answer all questions.
- Section B: answer one question.
- Use a black or dark blue pen. You may use an HB pencil for any diagrams or graphs.
- Write your name, centre number and candidate number in the boxes at the top of the page.
- Answer in the space provided.
- Do not use an erasable pen or correction fluid.
- Do not write on any bar codes.
- You may use a calculator.

#### **INFORMATION**

- The total mark for this paper is 50.
- The number of marks for each question or part question is shown in brackets [ ].
- All dimensions are in millimetres.

This document has 20 pages. Blank pages are indicated.

# Section A

Answer all questions in this section.


1	Give two	pieces	of information	required	when	buvina	woodscrews
•	CIVO LVVO	picoco	or innormation	roquirou	*****	Daying	********

1	 
2	
	[2]

2 A list of materials is given below.

brass	CFRP	copper	polycarbonate	stainless steel	
Select from the li	st <b>one</b> material	that is:			
(a) an alloy					[1]
(b) a composite					[1]

3 Complete the drawing below to show an exploded view of a corner halving joint.



[3]

4 Complete Table 4.1 by naming a suitable material for each product.

Table 4.1

Product	Suitable material
plastic chair	
metal water pipe fittings	
wooden model glider	

[3]

**5** Fig. 5.1 shows a coat hook for a child. The coat hook is made from 5 mm thick acrylic and will be batch produced.




Fig. 5.1

Complete Table 5.1 by stating how each item could be used to speed up batch production of the coat hook.

Table 5.1

Item	How each item is used to speed up production
Template	
Former	
Drilling jig	

[3]

**6** Table 6.1 shows two items of equipment used with a centre lathe. Complete Table 6.1 by stating the name of each item of equipment.

Table 6.1

Item of equipment	Name

[2]

7 Fig. 7.1 shows the end of a mild steel strip marked out, ready to be shaped.




Fig. 7.1

Name the hand tool used to:

	(a)	mark out the lines	1]
	(b)	saw off the waste metal	1]
	(c)	make the sawn edge flat and smooth	1]
8		plain <b>one</b> advantage of using Computer Numerically Controlled (CNC) machines compare n manually operated machines for batch production.	∍d
		[	2]

**9** Fig. 9.1 shows a box made from softwood. The box will have a base made from 4 mm thick manufactured board.

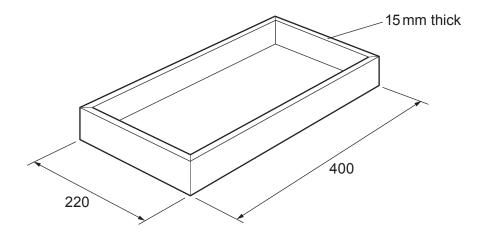


Fig. 9.1

Use sketches and notes to show how the base could be fitted **inside** the box so that the edges of the base are not seen.

[3]

10 Fig. 10.1 shows a plastic cup used for hot drinks.




Fig. 10.1

Explain how the designer of the cup has considered the needs of the user.					
[2]					

### **Section B**

Answer one question in this section.

**11** Fig. 11.1 shows a pen and pencil holder.

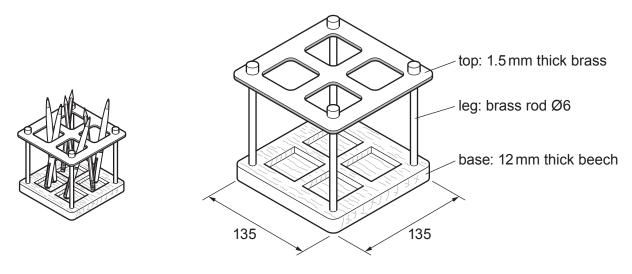


Fig. 11.1

(a) Fig. 11.2 shows the top part of the pen and pencil holder with the four shapes marked out.

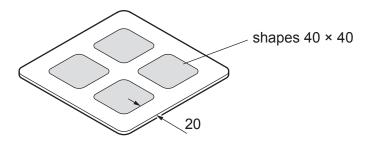


Fig. 11.2

Use sketches and notes to show how **one** of the shapes could be cut out and the edges made flat and smooth. Name all the tools and equipment used.

**(b)** Fig. 11.3 shows how the legs are fitted to the top of the pen and pencil holder by means of screw threads.

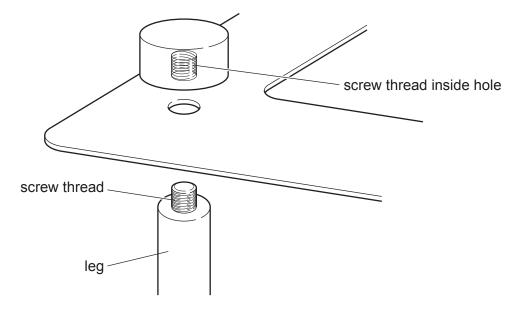


Fig. 11.3

(i)	Name the tool that could be used to cut the screw thread:	
	on the end of the leg	
	inside the hole.	
		[2

(ii) The screw thread could be replaced by a permanent method of fixing.

Circle from the list below a suitable permanent method of joining the legs to the top of the pen and pencil holder.

welding	brazing	soldering	
			[1]

(c) Fig. 11.4 shows details of the shapes to be cut out of the base of the pen and pencil holder. A drill bit has been used to remove most of the waste wood in one of the shapes.

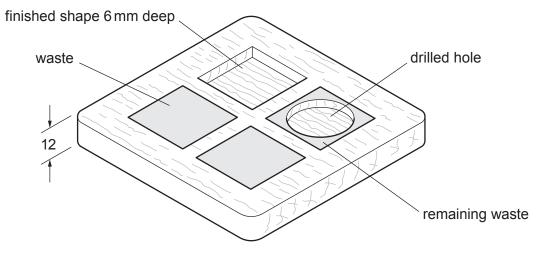


Fig. 11.4

(i) Use sketches and notes to show how the remaining waste wood could be removed to produce an accurate finished shape.

[3]

(d)	Use sketches and notes to show a modification to the design of the pen and pencil holder
	shown in Fig. 11.1 that would make it easier to carry.
	Name all materials and constructions used.

[4]

(e) Fig. 11.5 shows a pen and pencil holder made from acrylic.

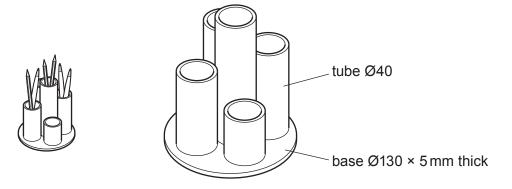


Fig. 11.5

(1)	Give <b>two</b> reasons why acrylic is a suitable material for the pen and pencil holder.	
	1	
	2	
		[2]
(ii)	Name the industrial process used to manufacture the acrylic tube.	
		[1]

(f) Fig. 11.6 shows part of a length of acrylic tube from which the five tubes will be sawn to length.




Fig. 11.6

(i)	Name a suitable saw that could be used to cut the acrylic tube to length.
	[1]
(ii)	Use sketches and notes to show a design for a sawing jig.  The jig must:  hold the tube securely  enable <b>five</b> different lengths, 50, 80, 90, 100 and 120 mm, to be sawn accurately.

[4]

[2]

**12** Fig. 12.1 shows an incomplete design for a storage box made from wood.

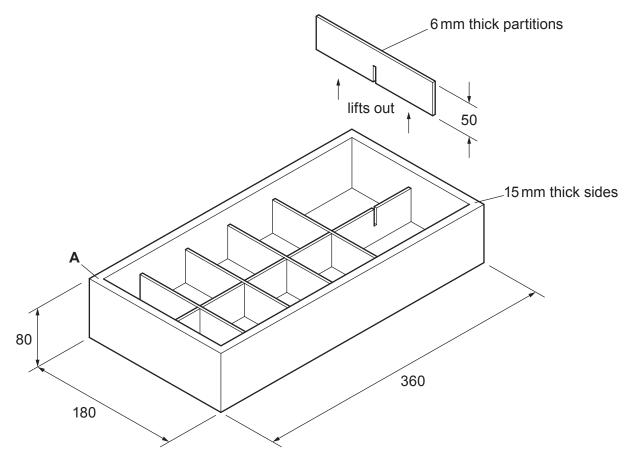


Fig. 12.1

(a) Complete Table 12.1 by adding the missing dimensions of the parts.

**Table 12.1** 

Part	Number required	Length	א (	Width	×T	Thickness	Material
Long side	2	360	×	80	×	15	beech
Short side	2	180	×		×	15	beech
Base	1		×	180	×	6	plywood
Long partition	1		×	50	×	6	plywood
Short partition	5		×	50	×	6	plywood

[4]

		I <del>T</del>
(b)	Nam	ne and sketch a permanent joint that could be used at corner A.
	Nam	ne of joint
(c)		12.2 shows a cross-halving joint used so that the partitions can fit together and be oved.
		Fig. 12.2
	(i)	Name <b>two</b> different saws that could be used to cut out the cross-halving joint.
		1
		2[2]
	(ii)	Give <b>two</b> advantages, other than cost, of making the partitions from plywood rather than beech.
		1
		2[2]

storage box.			

(d) Use sketches and notes to show a different method of keeping items separate inside a

[3]

- (e) To complete the design of the storage box in Fig. 12.1 modifications need to be made.
  - (i) Use sketches and notes to show a design for a lid that could be fitted to the storage box. Include all details of materials, constructions and fittings used.

[5]

(ii)	Use sketches and notes to show a modification that would make it easier to carry the
	storage box. Include all details of materials, constructions and fittings used.

[3]

(f) Fig. 12.3 shows a similar design for a storage box made from injection moulded plastic.

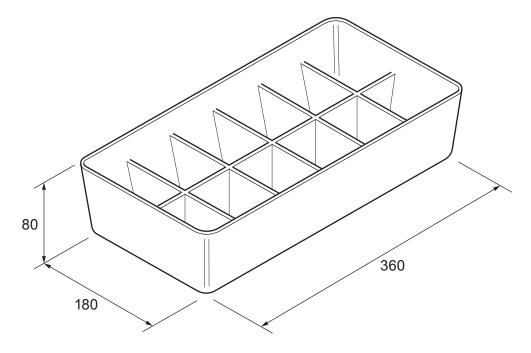


Fig. 12.3

Give two advantages of making the storage box from plastic rather than wood.

2 ......

[2]

**13** Fig. 13.1 shows wind chimes that will be batch produced in a school workshop. All the production methods require speed and accuracy.

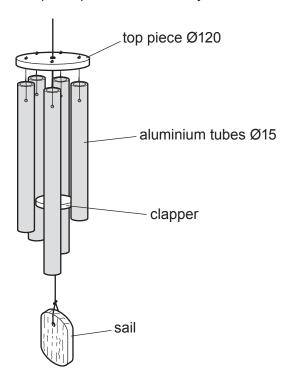


Fig. 13.1

(a)	Give <b>two</b> advantages of using a non-ferrous metal such as aluminium for the tubes rat	ther
	han a ferrous metal.	

1	
2	
	[2]

- (b) (i) Use sketches and notes to show a design for an adjustable sawing jig that could be used to cut five different lengths of tube to the following sizes: 300, 280, 250, 240 and 220 mm.
  - Name the materials used to make the sawing jig.

	(ii)	Describe how a centre lathe could be used to produce a flat and smooth finish to the sawn ends of the aluminium tubes.
		[3]
(c)	The	aluminium tubes will have a lacquered finish.
	(i)	Name an abrasive paper that could be used to prepare the surface of the aluminium tubes.
		[1]
	(ii)	Name a machine that could be used to produce a high quality finish on the aluminium tubes after abrasive paper has been used.
		[1]
	(iii)	State a method of applying lacquer quickly and evenly.
		[1]

(d) Fig. 13.2 shows a block of wood that will be used to make the top piece of the wind chimes. The shape of the top piece has been marked out and will be produced on a woodturning lathe.

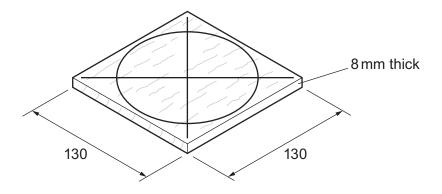


Fig. 13.2

(i) Circle from the list below **two** methods of woodturning that could be used to produce the top piece of the wind chimes.

parallel between-centres taper faceplate centre [2]

	(ii)	Use sketches and notes to show a different method of producing the shape for the top piece of the wind chimes.
		ro1
(e)		[3] scribe <b>two</b> quality control checks that could be carried out at any stage during the batch duction of the wind chimes.
	1	
	2	
		[4]
		[4]
		[4]
		[4]

(f) The wind chimes will be suspended from a bracket. Fig. 13.3 shows part of the wind chimes.




Fig. 13.3

Use sketches and notes to design a bracket from which the wind chimes could be suspended.

#### The bracket must:

- be able to be fixed to a wall
- hold the wind chimes securely.

Include details of all materials and constructions used.

[4]

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced online in the Cambridge Assessment International Education Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download at www.cambridgeinternational.org after the live examination series.

Cambridge Assessment International Education is part of the Cambridge Assessment Group. Cambridge Assessment is the brand name of the University of Cambridge Local Examinations Syndicate (UCLES), which itself is a department of the University of Cambridge.